WIRE MESH FENCE WITH
FILTER FABRIC MATERIAL.

$\frac{2}{1}$ MAXIMUM

NEWLY GRADED OR
DISTURBED SLOPE.

2 X 2 WOOD POST,
STEEL POST, OR
EQUIVALENT.

NO FILL WITHIN
4 FT. OF FENCE.

4 FT.

12 IN.

24 IN.

BURY BOTTOM OF FILTER
FABRIC MATERIAL WITH
EXCAVATED MATERIAL

8 IN.

## TYPICAL CROSS SECTION

WIRE MESH FENCE WITH
FILTER FABRIC MATERIAL.

6 IN.

3.5 FT.

24 IN.

6 FT. MAXIMUM

BURY BOTTOM OF FILTER FABRIC
MATERIAL IN 12 IN. X 8 IN. TRENCH.

## ELEVATION
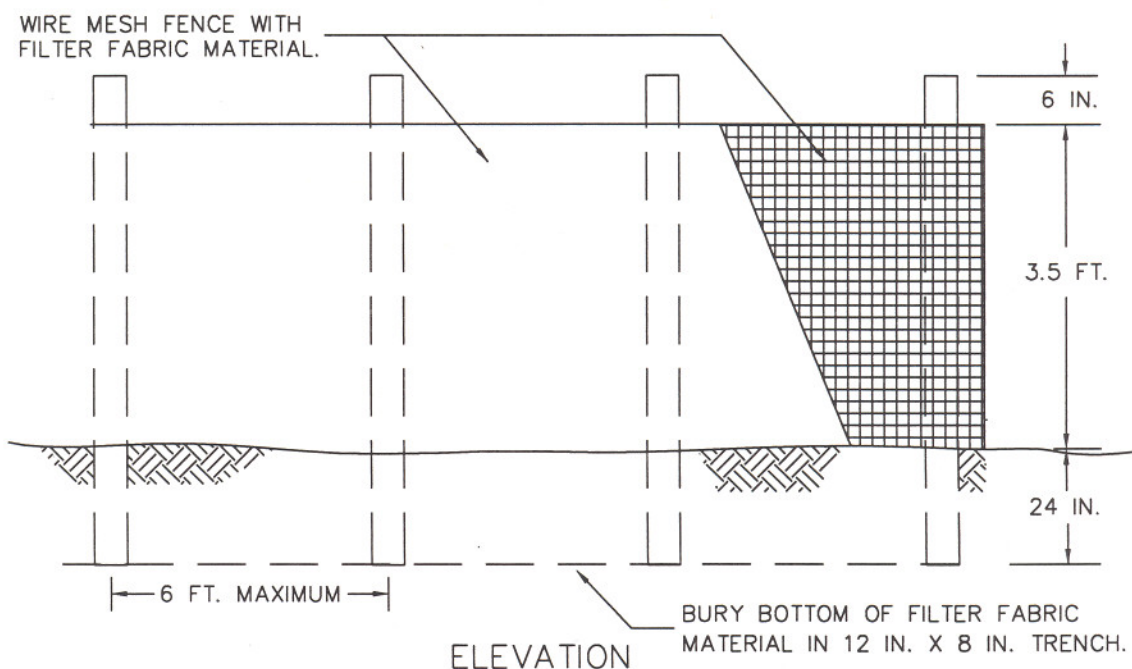
NOTES:

1. FENCE SHALL NOT BE INSTALLED ON SLOPES STEEPER THAN 2 : 1.

2. JOINTS IN FILTER FABRIC SHALL BE OVERLAPPED 6 INCHES AT POST.

3. USE STAPLES, WIRE RINGS, OR EQUIVALENT TO ATTACH FABRIC TO WIRE FENCE.

4. REMOVE SEDIMENT WHEN IT REACHES 1/3 FENCE HEIGHT.